

## Click & clean Central satellite

The most versatile, hygienic, robust and reliable central cleaning satellite on the market.

### Click & clean central units are standard equipped with:

- Stainless steel Maintenance free selector valve for water, chemicals and air. AISI316.
- Valve with PTFE seals for excellent chemical resistance.
- Air regulator.
- Air manometer.
- Lockable stainless steel cabinet, with sloped top cover for optimal hygiene. AISI316
- Internal PTFE hoses with stainless steel AISI316 wire for pré-mixed chemicals.
- 2 x stainless steel check valve for air supply protection.
- 1 x Check valve with detector when first check valve is failing.
- All adapters ½" BSP 60° hydraulic for seal or glue free connection.

### Wall mounted version




### FFDR version.

- Stainless steel chemical injector for sporadic use of acid for descaling.

Mounting example.

### Mounting example FFR version

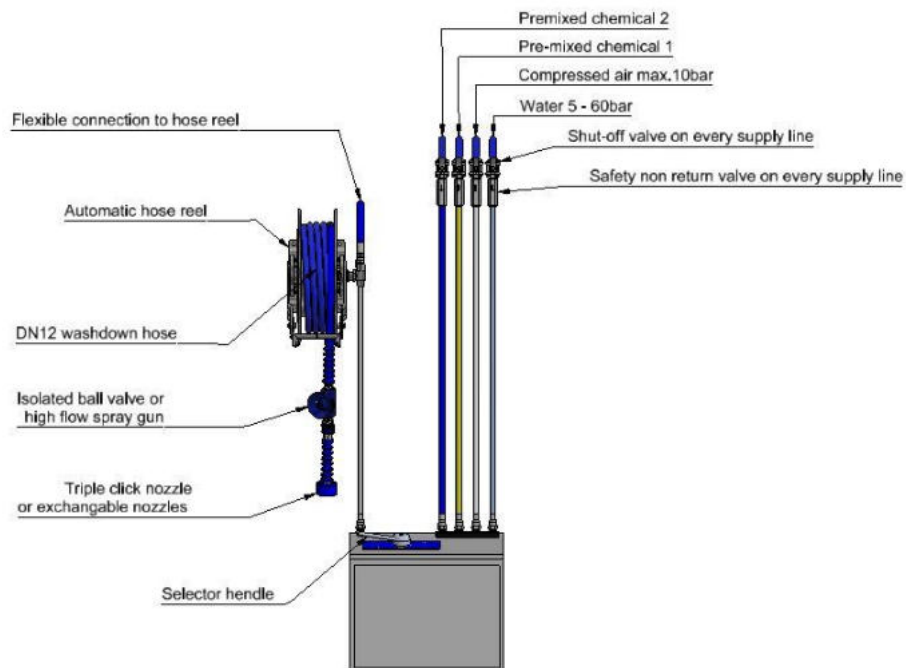



[Click & clean central switchbox.](#)

The click & clean Central FFR, FSR, FFRR, FFDR and FFFR series are equipped with the famous Dosanova “switchbox”. This massive AISI316 switchbox is equipped with PTFE seals for excellent chemical resistance.

With a single lever the operator can change between the different medias. Only compressed air, water and pré-mixed chemicals are to be connected to the unit.

In contrast to other similar systems in the market, it switches 100% mechanically. So no other parts are needed that often require maintenance and are expensive to replace.

This switchbox is very versatile, so there are plenty of options to meet your specific needs.

[Most common functions Click & clean central Versions:](#)

Type	FFR	FSR	FFRR	FFDR	FFFR
Reference:	100.200FFR	100.200FSR	100.200FFRR	100.200FFDR	100.200FFFR
Clear water rinse full flow.	✓	✓	✓	✓	✓
Second clear water rinse (hot, RO, demi water)	x	x	✓	x	x
Foaming premixed chemical 1	✓	✓	✓	✓	✓
Foaming premixed chemical 2	✓	x	✓	✓	✓
Spray cleaning chemical 2 (no foaming disinfection)	x	✓	x	x	x
Foaming premixed chemical 3	x	x	x	x	✓
Spray or foam decentral chemical	x	x	x	✓	x
Complete stop position.	✓	✓	x	x	x

Click & clean central units can be custom build with many other possibilities.

Technical specifications central FFR satellite:	
Water connection	1/2" M BSP 60°
Water pressure	5 - 60 bar
Water temperature	0 - 90°C.
Air connection	1/2" M BSP 60°
Air pressure	5 - 10 bar
Pré-mixed chemical connections	1/2" M BSP 60°
Pré-mixed chemical pressure	5 – 10bar
Basic functions	<ul style="list-style-type: none"> <li>• Foam cleaning</li> <li>• Foam Disinfection</li> <li>• Clean water rinse</li> </ul>
Chemical injectors	2 - 100% separated
Dosing ratio	0.15 - 15%
Materials	Stainless steel AISI316
Dimensions (HxWxD):	500 x 500 x 210 mm.

Legend Click & clean Central FFR

